
UNITED
สายไฟ ยูไนเต็ด

VCT

VCT 450/750 V 70˚C

4 CORES - PVC INSULATED AND SHEATHED CABLE ROUND TYPE, FLEXIBLE CONDUCTOR

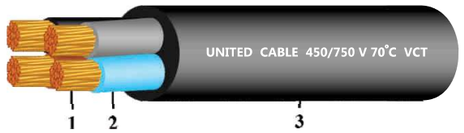

Construction

1. Conductor : Bunch stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC)
   Colour code : Light Blue, Brown, Black, Grey
3. Sheath : Polyvinyl chloride (PVC), Black colour

Reference Standard

TIS 11 Part 101-2553

Application

* Use for general purpose
* Use for connecting electric appliance
* Laid on cable trays

Classification

Maximum conductor temperature : 70˚C
Rated voltage : 450/750 V
AC test voltage : 2,500 V

Conductor			Thickness of insulation	Thickness of sheath	Overall diameter	Current rating in free air	Insulation resistance at 70˚C	Cable weight	Standard length
Croos-sectional area mm²	Dia. of wires mm (Max.)	Conductor resistance at 20˚C Ω/km (Upper limit)	mm	mm	mm (Approx.)	A	MΩ-km (Min.)	kg/km (Approx.)	m
4	0.31	4.95	0.9	1.8	17.0	26	0.0084	380	100/C
6	0.31	3.30	0.9	2.0	19.5	34	0.0071	540	100/C
10	0.41	1.91	1.1	2.2	24.0	47	0.0068	860	500/D
16	0.41	1.21	1.1	2.6	28.0	63	0.0050	1,220	500/D
25	0.41	0.780	1.3	2.8	33.0	83	0.0048	1,800	500/D
35	0.41	0.554	1.3	3.1	37.0	102	0.0041	2,380	500/D

C = Packing in coil / D = Packing in drum

UNITED
สายไฟ ยูไนเต็ด

VCT

VCT 450/750 V 70˚C

สายอ่อนหุ้มด้วยฉนวน และเปลือก แรงดันไฟฟ้ากำหนด 450/750 โวลต์

อุณหภูมิ 70˚C มอก.11 เล่ม 101-2553

Product	Core	Size	Baht / Meter
VCT	4	4	127.50
		6	191.20
		10	335.50
		16	485.40
		25	731.40
		35	1,018.00

***ราคาอาจมีการเปลี่ยนแปลง โดยไม่ต้องแจ้งให้ทราบล่วงหน้า**